

41

<b>CERTIFICATE OF TRANSMISSION BY FACSIMILE (37 CFR 1.8)</b>			<b>Docket No.</b> 1549.004
Applicant(s): <b>Bauder</b>			
<b>Serial No.</b> 10/030,328	<b>Filing Date</b> 11/9/01	<b>Examiner</b> Goetz	<b>Group Art Unit</b> 3725
Invention: <b>METHOD FOR PRODUCING A STRIP LIKE PRE-MATERIAL.....</b>			
			<b>RECEIVED CENTRAL FAX CENTER JUN 29 2004 OFFICIAL</b>
I hereby certify that this <u>Petition for Revival w/auth to chg and Response</u> (Identify type of correspondence) is being facsimile transmitted to the United States Patent and Trademark Office (Fax. No. <u>(703) 872-9302</u> ) on <u>June 29, 2004</u> (Date)			
<u>Wanda Ruggiera</u> (Typed or Printed Name of Person Signing Certificate) <u>Wanda Ruggiera</u> (Signature)			
Note: Each paper must have its own certificate of mailing.			

**Petition For Revival Of An Application For Patent Abandoned  
Unintentionally Under 37 CFR 1.137(b) (Small Entity)**

Docket No.  
1549.004

In Re Application Of: **Bauder**

Serial No.  
10/030,328

Filing Date  
11/9/01

Examiner  
Goetz

Group Art Unit  
3725

Invention: **METHOD FOR PRODUCING A STRIP LIKE PRE-MATERIAL...**

Attention: Office of Petitions  
COMMISSIONER FOR PATENTS  
P.O. Box 1450  
Alexandria, VA 22313-1450

NOTE: If information or assistance is needed in completing this form, please contact Petitions Information at (703) 305-9282.

The above-identified application became abandoned for failure to file a timely and proper response to a notice or action by the Patent and Trademark Office. The date of abandonment is the day after the expiration date of the period set for reply in the Office notice or action plus any extension of time actually obtained.

**APPLICANT HEREBY PETITIONS FOR REVIVAL OF THIS APPLICATION**

NOTE: A grantable petition requires the following items:

- (1) Petition fee;
- (2) Reply and/or issue fee;
- (3) Terminal disclaimer with disclaimer fee--required for all utility and plant applications filed before June 8, 1995; and for all design applications; and
- (4) Statement that the entire delay was unintentional.

1. ☒ A proposed reply to the above-identified Office Action:

☒ is enclosed. ☐ was filed on \_\_\_\_\_

The proposed reply is in the form of: Response

2. ☐ The issue fee:

☐ is enclosed. ☐ was paid on \_\_\_\_\_

3. ☐ A small entity declaration:

☐ is enclosed. ☐ was filed on \_\_\_\_\_

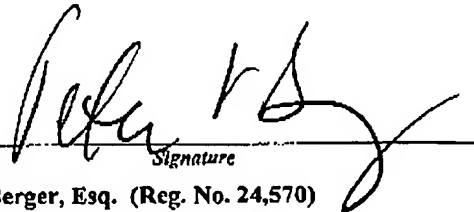

4. ☒ The abandoned application was a:

☐ design application. ☒ utility application. ☐ plant application.

5. ☐ A terminal disclaimer (and fee) disclaiming a period equivalent to the period of abandonment is enclosed.

6. ☒ Since this utility/plant application was filed on or after June 8, 1995, no terminal disclaimer is required.

<b>Petition For Revival Of An Application For Patent Abandoned Unintentionally Under 37 CFR 1.137(b) (Small Entity)</b>			<b>Docket No. 1549.004</b>
In Re Application Of: <b>Bauder</b>			
Serial No. 10/030,328	Filing Date 11/9/01	Examiner Goetz	Group Art Unit 3725
Invention: <b>METHOD FOR PRODUCING A STRIP LIKE PRE-MATERIAL....</b>			
<b>Calculation and Payment of Fees</b>			
Enclosed are the following fees:			
7. <input checked="" type="checkbox"/> Petition fee under 37 CFR 1.17(m) in the amount of:	<u>\$665.00</u>		
8. <input type="checkbox"/> Fee for amendment in the amount of:	_____		
9. <input type="checkbox"/> Fee for extension of time to reply to Office Action in the amount of:	_____		
10. <input type="checkbox"/> Issue fee in the amount of:	_____		
11. <input type="checkbox"/> Continuing application filing fee in the amount of:	_____		
12. <input type="checkbox"/> Terminal disclaimer fee in the amount of:	_____		
13. <input type="checkbox"/> _____	_____		
Total fees enclosed:			<u>\$665.00</u>
The fee of \$665 is to be paid as follows:			
<input type="checkbox"/> A check in the amount of the fee is enclosed.			
<input checked="" type="checkbox"/> The Director is hereby authorized to charge any fees which may be required, or credit any overpayment, to Deposit Account No. 02-2105			

<b>Petition For Revival Of An Application For Patent Abandoned Unintentionally Under 37 CFR 1.137(b) (Small Entity)</b>			<b>Docket No.</b> 1549.004
In Re Application Of: Bauder			
<b>Serial No.</b> 10/030,328	<b>Filing Date</b> 11/9/01	<b>Examiner</b> Goetz	<b>Group Art Unit</b> 3725
Invention: <b>METHOD FOR PRODUCING A STRIP LIKE PRE-MATERIAL....</b>			
<p style="text-align: center;"><b>Statement</b></p> <p>The entire delay in filing the required reply from the due date for the required reply until the filing of a grantable petition under 37 CFR 1.137(b) was unintentional.</p>			
 Signature		Dated: June 29, 2004	
Peter L. Berger, Esq. (Reg. No. 24,570) Levisohn, Berger & Langsam, LLP 805 Third Avenue, 19th Floor New York, New York 10022 Phone (212) 486-7272 Fax (212) 486-0323		<div style="border: 1px solid black; padding: 5px;"><p>I certify that this document and fee is being deposited on <u>6/29/04</u> with the U.S. Postal Service as first class mail under 37 C.F.R. 1.8 and is addressed to the Mail Stop Petition, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.</p><p style="text-align: center;"> Signature of Person Mailing Correspondence</p><p style="text-align: center;">Wanda Ruggiero Typed or Printed Name of Person Mailing Correspondence</p></div>	
CUSTOMER NO. 04617			
CC:			

**RECEIVED  
CENTRAL FAX CENTER**

JUN 29 2004

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re: Application of: Bauder  
Serial No.: 10/030,328  
Art Unit: 3725  
Examiner: Goetz  
Filing Date: 11/9/01  
For: Method for Producing a Strip  
Like Pre-Material ....  
Attorney Docket No.: 1549.004

June 29, 2004

**OFFICIAL**

**VIA FAX (703) 872-9302**  
Commissioner for Patents  
PO Box 1450  
Alexandria, VA 22313-1450

**RESPONSE**


Sir:

In response to the Notice of Non-Compliant Amendment dated November 19, 2003, a clean set of claims are submitted below.

The Notice of Non-Compliant Amendment was sent to our old office address and we did not receive it in time to make a response prior to a notice of abandonment. Thus, we are also submitting a Petition for Revival together with the appropriate fees which are to be charged to our Deposit Account No. 02-2105.

In view of the above action and comments, an early notice of allowance is solicited.

Respectfully submitted,

  
Peter L. Berger (Reg. No. 24,570)

LEVISOHN, BERGER & LANGSAM, LLP  
805 Third Avenue, 19<sup>th</sup> Floor  
New York, New York 10022  
(212) 486-7272 (phone)  
(212) 486-0323 (fax)  
Customer No. 04617

H:\W\LR\1\1549\1549.004Amd629D4.wpd

**CLAIMS:**

1. (Amended) Method for producing a strip-like pre-material from metal by means of rollers of a roll stand, which define a roll gap, by rolling a metal strip in at least two rolling steps,

characterised in that a profile is rolled discontinuously into the metal strip in successive steps between the same two rollers said method comprising

(a) rolling a section of the metal strip in a first step

(b) recalling the metal strip by a length which is selected to be shorter than the circumference of the rollers and

(c) rolling the metal strip at least once again in a subsequent step within the section of the strip which has been rolled in the preceding step, and

(d) rolling a subsequent section of the metal strip by performing steps (a) to (c) in said subsequent section, the profile extending over the full width of the metal strip and having a metal-strip thickness varying over the length of the metal strip, whereby said metal strip is divided into a series of sections, each of which is rolled at least twice before a subsequent section is rolled.

2. (Original) The method as defined in Claim 1, characterised in that the metal strip (16) is rolled also during the recalling step.

3. (Twice Amended) The method as defined in Claim 1, characterised in that the recalled length of the metal strip (16) is selected to be maximally equal to half the circumference of the rollers (11, 12).

4. (Amended) The method as defined in Claim 1, characterised in that the two rollers (11, 12) are selected to have a cylindrical shape.

5. (Amended) The method as defined in claim 1, characterised in that the last rolling step in each of the recalled sections of the metal strip (16) is carried out between circumferential segments of the two rollers (11, 12) that have not yet acted on the respective section of the metal strip (16) in the one or more preceding rolling steps.

6. (Original) The method as described in Claim 5, characterised in that step-by-step repeated rolling of the respective section of the metal strip (18) is carried out in such a way that of the circumferential segments of the two rollers (11, 12) that act on the respective section of the metal strip (16), the circumferential segment of the two rollers (11, 12) that acts on the respective section of the metal strip (16) in the first step has carried out the greatest number of rolling steps, and the circumferential segment of the rollers (11, 12) that acts on the respective section of the metal strip (16) in the last rolling step has carried out the smallest number of rolling steps.

7. (Original) The method as defined in Claim 6, characterised in that the smallest number is selected to be zero.

8. (Original) The method as defined in Claim 5, 6 or 7, characterised in that the shell surface of the two rollers (11, 12) is reworked to restore the original surface quality when a predetermined number of rolling steps has been reached by those circumferential segments with which the smallest number of rolling steps has been carried out.

9. (Original) The method as defined in Claim 8, characterised in that the predetermined number of rolling steps is adjusted to the desired surface quality of the strip-like pre-material.

10. (Amended) The method as defined in claim 1, characterised in that by rolling the metal strip (16) it is simultaneously equalised.

Claims 11, 12 and 13 have been cancelled.

14. (Amended) The method as defined in claim 1, characterised in that the rollers (11, 12) and the metal strip (16) are accelerated and braked in the respective rolling steps in synchronism and to the same degree.

15. (Amended) The method as defined in Claim 1, characterised in that for producing a strip-like pre-material with a profile recurring in successive sections of the pre-material, a roll stand (2) is used which permits the height of the roll gap (13) to be varied, and that the sections of the metal strip (16) to be profiled are passed through the roll gap (13) in recurring steps of predetermined lengths (21) until the depth of the desired profile of the pre-material has been reached in the respective section of the metal strip (16).

16. (Amended) The method as defined in Claim 12 or 15, characterised in that a profile is rolled into the recalled section of the metal strip (16) in two or more than two rolling steps.

17. (Amended) The method as defined in Claims 12 or 15, characterised in that the profile is rolled into the metal strip (16) from above.

18. (Amended) The method as defined in Claim 12 or 15, characterised in that the profile is rolled into the metal strip (16) from below.

19. (Amended) The method as defined in Claim 12 or 15, characterised in that a profile is rolled into the metal strip (16) from above and from below.

20. (Amended) The method as defined in Claim 12, characterised in that the metal strip (16) is merely reduced in thickness, but not yet profiled, in a first rolling step.



22. (Amended) The method as defined in Claim 20, characterised in that the reducing step is followed by one or more profiling steps between the same two rollers (11, 12).

23. (Twice Amended) The method as defined in Claim 20, characterised in that the length (L2) of the reducing step is greater than the lineal length (L1) of the next following profiling step.

24. (Twice Amended) The method as defined in Claim 20, characterised in that the metal strip (16) is recalled, following the reducing step, by a lineal length smaller than the lineal length (L2) of the reducing step and greater than the lineal length (L1) of the next following profiling step in the same section of the metal strip (16).

25. (Amended) The method as defined in Claim 12, characterised by the use of a roll stand (2) in which at least one of the two rollers (12) comprises in its shell surface a profiled segment (35, 40) with a contour which, in combination with the contour of the other roller (11), defines the roll gap (13).

26. (Amended) The method as defined in Claim 25, characterised in that prior to rolling a profile, the metal strip (16) is first equalised in the roll gap (13) between the same rollers (11, 12) in steps of a lineal length (L2) not smaller than the lineal length (L1) of the first profiling step, with moderate reduction in thickness, is then recalled by a step equal to at least the lineal length (L1) of the first profiling step and maximally equal to the second lineal length (L2), whereafter the profile is rolled into the recalled section of the metal strip (16), and that the rollers (12) for equalising the metal strip (16) comprise on their shell surface a cylindrical circumferential segment (36) which is separated, if necessary, from the profiled circumferential segments (35, 40) that exhibit a non-cylindrical contour.

27. (Amended) The method as defined in Claim 12, characterised in that one roller (12) of the roll stand (2) is displaced during the rolling process of the metal strip (16) for varying the height of the roll gap (13).

28. (Amended) The method as defined in Claim 27, characterised in that the upper or the lower roller (11, 12) are selectively displaced during the rolling process.

29. (Original) The method as defined in Claim 27, characterised in that the respective roller (11, 12) is displaced by means of a servo drive (32, 34, 44).

30. (Original) The method as defined in Claim 29, characterised in that one or two electric motors (34) or one or two short hydraulic cylinders are used for the servo drive.

31. (Amended) The method as defined in Claim 27, characterised in that the displacement of the roller (12) is effected by means of a programme-controlled drive (32, 33, 34, 44), the profile to be produced in the respective rolling step being stored in a program-controllable control unit (43) as control curve for the drive (32, 33, 34, 44) which effects the displacement of the roller (12).

32. (Amended) The method as defined in Claim 27, characterised in that one of the rollers, specifically the upper roller (12), has a notch (45) parallel to its axis.

33. (Amended) The method as defined in claim 1, characterised in that the two rollers (11, 12) are driven step by step and in synchronism with the feeding motion of the metal strip (16).

34. (Amended) The method as defined in claim 1, characterised in that the two rollers (11, 12) are differently rotated during the recalling action of the metal strip (16).

35. (Amended) The method as defined in Claim 15, characterised in that a relieved portion (37, 38, 39) is provided in the shell surface of the rollers (11, 12), between the circumferential segments (35, 36, 40) effective during the rolling process, which relieved portion extends over a circumferential angle such that the next following circumferential segment (35, 36, 40) to become active during the rolling process will cut into the metal strip (16) only after the preceding circumferential segment of the metal strip (16), active during the rolling process, has released the metal strip (16).

36. (Amended) The method as defined in claim 10 or 25, characterised in that the thickness of the metal strip (16) is reduced during the equalising step by a dimension in the order of one tenth of the thickness.

37. (Amended) The method as defined in claim 1, characterised in that the metal strip (16) to be rolled is unwound from a first coiler (5) and the rolled metal strip (16) is wound up on a second coiler (6), and that the rotational speed of the rollers (11, 12) and the circumferential speed of the second coiler (16) are mutually matched, especially in the phase when the rollers (12, 13) cut into the metal strip (16).

38. (Amended) The method as defined in claim 1, characterised in that cutting-in by a roller (12) is effected at reduced rotational speed of the roller (12) and, correspondingly, reduced feeding speed of the metal strip (16) and that the movements are then accelerated.

39. (Amended) The method as defined in Claim 1, characterised in that the metal strip (16) is recalled using a first pair of grippers (52).

40. (Original) The method as defined in Claim 39, characterised in that the metal strip (16) is advanced by the first pair of grippers (52) also for rolling.

41. (Amended) The method as defined in Claim 39, characterised in that the metal strip (16) is pulled, during rolling, by a second pair of grippers (53) engaging that section of the metal strip (16) that exits from the roll gap (13).

42. (Amended) The method as defined in claim 1, characterised in that a tensile strength is constantly maintained in the metal strip (16), during rolling just as during the recalling action.

43. (Amended) The method as defined in claim 1, characterised in that the width of the metal strip (16) is selected in such a way that two or more than two of the objects, that are intended to be punched out from the pre-material formed by rolling, can be punched out one beside the other.

44. (Amended) A device having a roll stand (2) with two rollers (11, 12) that define a roll gap (13) the height of which can be varied,

and with a recalling device (5, 52) for a metal strip (16) to be rolled, arranged on the run-in end of the roll gap (13),

for producing a strip-like pre-material from metal, with a profile which recurs in successive sections of the pre-material, according to the method defined in Claim 12,

for which purpose the first (11) and/or the second roller (12) are provided on their shell surface with two or more than two circumferential segments (35, 36, 40), following each other in the circumferential direction, which are not all of them equal in contour,

and for which purpose a drive motor (7, 54) is provided for the recalling device (5, 52) arranged on the run-in end of the roll gap (13), for recalling the metal strip (16) by steps of predeterminable length.

45. (Amended) The device as defined in Claim 44, wherein the recalling device is a first coiler (5).

46. (Amended) The device as defined in Claim 44, wherein the recalling device is a gripper feed mechanism (52).

47. (Amended) The device as defined in claim 44, wherein a pulling device (6, 53) for the strip-like pre-material is provided on the run-out end of the roll gap (13).

48. (Amended) The device as defined in Claim 47, wherein the pulling device is a second coiler (6) for winding up the strip-like pre-material.

49. (Amended) The device as defined in Claim 47, wherein the pulling device is a second gripper feed mechanism (53).

50. (Amended) The device as defined in Claim 44, wherein the two rollers (11, 12) can be driven one independently from the other.

51. (Amended) The device as defined in Claim 44, wherein at least one roller (11, 12) has a cylindrical circumferential segment (36).

52. (Amended) The device as defined in Claim 51, wherein both rollers (11, 12) have a cylindrical circumferential segment (36).

53. (Amended) The device as defined in Claim 44, wherein the roll stand (2) is designed as equalising rolling mill.

54. (Amended) The device as defined in Claim 44, wherein the drive motor (7, 52) for the recalling device (5, 52) provided on the run-in end of the roll gap (13) is an electric servomotor.

55. (Amended) The device as defined in Claim 44 wherein the pulling device (6, 53) provided on the run-out end of the roll gap (13) is driven by an electric servomotor (8, 55).

56. (Amended) The device as defined in Claim 44, wherein the two rollers (11 and 12) are each loaded on their side facing away from the roll gap (13) by one supporting roller (14, 15) whose roll necks (25) are pre-stressed in their roll neck bearings (26) for reducing their bearing play.

57. (Amended) The device as defined in Claim 44, wherein the first roller (11) and the second roller (12) are not loaded by supporting rollers, but rather the roll necks (21, 22) of the first roller (11) and of the second roller (12) are pre-stressed in their roller neck bearings (22) for reducing their bearing play.

58. (Amended) The device as defined in Claim 44, wherein the first and the second rollers (11, 12) are discontinuously driven in a manner such that they are driven, during the strip feed, in synchronism with the pulling device (6, 53) provided on the run-out end of the roll gap (13), whereas they are temporarily stopped and/or positioned individually or jointly by forward or reverse rotation when the recalling device (5, 52) provided on the run-in end of the roll gap (13) is driven in the reverse sense for recalling the metal strip (16).

59. (Amended) The device as defined in Claims 44, wherein the circumferential speed of the two rollers (11, 12) and the speed of the pulling device (6, 53), preferably also the speed of the recalling device (5, 52) can be controlled in arbitrary fashion.

60. (Amended) The device as defined in Claim 44, wherein one of the two rollers (12, 13), preferably the upper roller (12), can be moved up and down in controlled fashion during the rolling process.

61. (Amended) The device as defined in Claim 60, wherein the one or the other roller (11, 12) can be selectively moved up and down in controlled fashion during the rolling process.

62. (Amended) The device as defined in Claim 60 or 61, wherein one or more servo drives (32, 33, 34, 44) are provided for effecting the displacement of the respective roller (11, 12).

63. (Amended) The device as defined in Claim 62, wherein the servo drives (32, 33, 34, 44) comprise one electric motor (34) or one or two short hydraulic cylinders each.

64. (Amended) A device having a roll stand (2) with two rollers (11, 12) that define a roll gap (13) the height of which can be varied,  
and with a recalling device (5, 52) for a metal strip (16) to be rolled, arranged on the run-in end of the roll gap (13),  
for producing a strip-like pre-material from metal, with a profile which recurs in successive sections of the pre-material, according to the method defined in Claim 12,  
for which purpose one of the two rollers (11, 12) can be moved up and down in the roll stand (2) in controlled fashion during the rolling process, by a distance determined by the desired profile, in response to the feeding motion of the metal strip (16),  
and for which purpose a drive motor (7, 54), specifically a servomotor, is provided for the recalling device (5, 52) arranged on the run-in end of the roll gap (13), for recalling the metal strip (16) by steps of predeterminable length.

65. (Amended) A device having a roll stand (2) with two rollers (11, 12) that define a roll gap (13),

and with a recalling device (5, 52) for a metal strip (16) to be rolled, arranged on the run-in end of the roll gap (13),

for producing a strip-like pre-material from metal with high surface quality, according to the method defined in Claim 1,

for which purpose a drive motor (7, 54), specifically a servomotor, is provided for the recalling device (5, 52) arranged on the run-in end of the roll gap (13), for recalling the metal strip (16) by steps of predeterminable length.

66. (Amended) The device as defined in Claim 64 or 65, wherein a pulling device (6, 53) for the strip-like pre-material is provided on the run-out end of the roll gap (13).

67. (Amended) The device as defined in Claim 64 or 65, wherein the recalling device is a first coiler (5).

68. (Amended) The device as defined in Claim 64 or 65, wherein the recalling device is a gripper feed device (52).

69. (Amended) The device as defined in Claim 66, wherein the pulling device is a second coiler (6) for winding up the strip-like pre-material.

70. (Amended) The device as defined in Claim 66, wherein the pulling device is a second gripper feed mechanism (53).

71. (Amended) The device as defined in Claim 66, wherein a servomotor (8, 55) is provided also for the pulling device (6, 53) provided on the run-in end of the roll gap (13).



72. (Amended) The device as defined in Claim 60 or 64, wherein an electric control unit (43) is provided in which the displacement of the one roller (12) required for an intended profile is, preferably, digitally stored as curve and wherein the servomotors (7, 8; 54, 55) of the recalling device (5, 52) and of the pulling device (6, 53), one or two servomotors (41, 42) for rotating the two rollers (11, 12), and one or more actuating drives (32, 33, 34) for the displaceable roller (12) coupled with an incremental rotary transducer (44), are connected to said control unit (43).

73. (Amended) The device as defined in Claim 44 or 64 or 65 or 72, wherein the sense of rotation of the two rollers (11, 12) can be reversed for rolling in both directions.

74. (Amended) The device as defined in Claim 51, wherein the displaceable roller (11) has a notch (45) parallel to its axis.